

Performance Analysis of Fixed and Tracking Flat Plate Collectors

Sudarshan T A

Assistant Professor, Department of Mechanical Engineering, New Horizon College of Engineering, Bangalore, India

ABSTRACT

This paper focuses on Thermal efficiency analysis of flat plate collectors. The instantaneous efficiency for a collector over a day is calculated. Application of solar energy for domestic and industrial heating purposes has been become very popular. However the effectiveness of presently used fixed flat plate collectors is low due to the moving nature of the energy source. In the present work, an attempt has been made to compare the performance of fixed flat plate water heater with that of heater with tracking by conducting experiments. A flat plate water heater, which is commercially available with a capacity of 100liters/day is instrumented and developed into a test-rig to conduct the experimental work. The analysis is carried during which the atmospheric conditions were almost uniform and data was collected both for fixed and tracked conditions of the flat plate collector. The results show that there is an average increase of 400C in the outlet temperature. The efficiency of both the conditions is calculated and the comparison shows that there is an increase of about 21% in the percentage of efficiency.

Keywords: Flat Plate, Energy Source, Water Heater

I. INTRODUCTION

Solar energy is the energy from the sun. The sun radiates an enormous amount of energy in the form of heat and light resulting from nuclear fusion reaction in its core. Some Solar systems utilises heat energy for heating and others converts sunlight energy into electrical energy. Solar energy is a renewable energy source and inexhaustible in nature. Only a small part of the solar energy that the sun radiates into space ever reaches the earth, but that is more than enough to supply all our energy needs. The sun constantly delivers 1.36 kW of power per square meter to the earth. Solar energy is mainly used to heat buildings and water and to generate electricity. The major component unique to passive systems is the Flat plate collector. This device absorbs the incoming solar radiation, converting it into heat at the absorbing surface, and transfers this heat to a fluid (water) flowing through the Flat plate collector.

The warmed fluid carries the heat either directly to the hot water or to a storage subsystem from which can be drawn for use at night and on cloudy days. There are different type of solar collectors like flat-plate collectors, Focusing type collector and evacuated type collector.

II. FLAT PLATE COLLECTORS

The main components of a flat plate solar collector are:

- **Absorber plate** made of copper material, which is black coated to absorb maximum sun radiations falling on it
- **Tubes or fins** for conducting or directing the heat transfer fluid from the inlet header or duct to the outlet.
- **Glazing**, this may be one or more sheets of glass or a diathermanous (radiation transmitting) plastic film or sheet.
- **Thermal insulation**, which minimizes

- downward heat loss from the plate.
- **Cover strip**, to hold the other components in position and make it all Watertight.
- **Container or Casing**, which surrounds the foregoing components and keeps them free From dust, moisture, etc

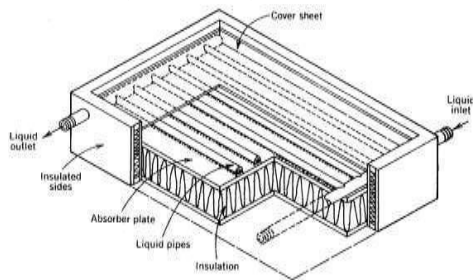


Figure 1 Components of a flat plate solar collector

III. THE DESIGN PROCEDURE OF FLAT PLATE COLLECTORS

1) TECHNICAL SPECIFICATIONS

Collector specifications:-

- Solar frame : Width 93mm thickness 1.2mm with powder coating.
- Back sheet : Aluminum sheet 0.45 mm.
- Insulation : Fiber glass wool 25mm thick 18kg density.
- Fins : 9 fins of 56mm, 1/2 inch copper pipe, 0.12mm copper Sheet with black coating ultrasonic weld.
- Front glazing : Toughened glass 4mm thick.
- Bonding between Riser And Absorber sheet : Continuous ultrasonic welding.
- Assembly : assembled under pneumatic technology.
- Bonding between Riser And Header : Brazing
- Aluminum foil : 0.05 mm
- Gromets : EPDM
- Packing sheet : Corrugated
- Collector size : 1030mm X 2030mm
- Collector beading : EPDM
- Rubber bedding Storage tank specifications
 - Storage tank : Stainless steel 304 Grade.
 - Insulation : Rockwool / Min / puff.
 - Tank outer cladding : Powder coated sheet / Stainless steel.

- Inter connecting pipes : Stainless steel 304 Grade.
- Electrical backup : 2 KW thermostats controlled
- Storage tank stand & Hose pipe: Mild steel & 25/35 EPDM Rubber

IV. TESTING OF FLAT PLATE COLLECTORS

For the testing of solar collectors there are two basic procedures, the instantaneous procedures and the calorimetric procedure. Each of these two procedures will allow determination of the fundamental characteristics of the collector. The most widely used procedure for testing collectors is the instantaneous procedure. In this procedure it is only necessary to measure simultaneously under steady state conditions the mass flow rate of the working fluid through the collector, the fluid temperature rise between the collector inlet and outlet, and the isolation on the plane of the collector. The instantaneous efficiency can then be calculated from the following expressions.

$$\eta_i = Q / (AP \times IT)$$

Where,

η_i = Instantaneous efficiency AP

= Area of the collector Plate IT

= Radiation on tilted surface

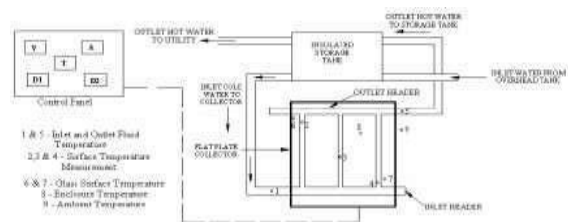


Figure 2. Experimental Setup

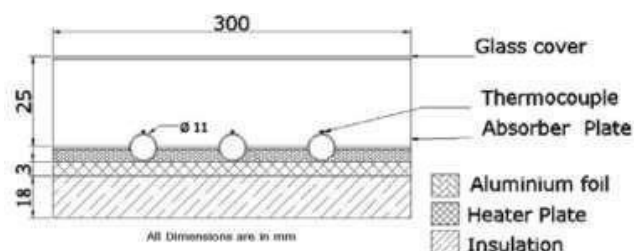


Figure 3. Cross sectional view of the experiment setup

Calculation of Instantaneous Efficiency Observations

Constant Terms:-

- Length of the absorber plate 'L' = 2.03 m
- Breadth of absorber plate 'B' = 1.03 m
- I.S.T (Indian standard time)
When reading was taken = 11.00 Hrs
- Location of Bangalore = 77.59 °E, 12.96 °N
- I.S.T Longitude = 82.5° E
- Date on which the Experiment was conducted = 2nd November 2010
- Collector is facing due south
- Mass flow rate = 0.5 LPM

Variable Terms:-

- Inlet temperature of water = 27° C
- Outlet temperature of water = 42° C
- Angle of tilt = 60° C

Sl no	I.S.T hours	Temperature of the inlet fluid T _i	Temperature of the outlet fluid T _o
1	8.00	24	25
2	9.00	24	29
3	10.00	26	35
4	11.00	27	42
5	12.00	27	45
6	13.00	28	48
7	14.00	28	45
8	15.00	30	40
9	16.00	29	35
10	17.00	28	31

Table 1. Observation of Test Set up

Calculations

Trial 1 – 11 AM a) Incident angle θ :-

$$\cos\theta = \cos(\Phi - \beta) \cos\omega \cos\delta + \sin(\Phi - \beta) \sin\delta \text{ Here,}$$

$$\Phi = 12.96^\circ \text{ for Bangalore}$$

$$\delta = \text{Declination angle} = 23.45 \sin[360(284+n)/365]$$

Here, n = 336 for december 2

Where,

$$\delta = -22.11^\circ$$

$$\omega = \text{Hour angle} = 15(12 - \text{LST})$$

$$\text{LST} = \text{IST} - 4(82.5^\circ - \text{longitude of location}) +$$

Equation of time

$$60$$

$$= 11.00 - 4(82.5^\circ - 77.59^\circ) + 11'.14''$$

$$60$$

$$= 11.00 - 20' + 11'.14''$$

$$= 10.51 \text{ hrs}$$

$$\omega = 15(12.00 - 10'.51'') = 16.5^\circ$$

Substituting all the values in the above equation we get ,

$$\cos\theta = \cos(12.96^\circ - 60^\circ) \cos(16.5^\circ) \cos(-22.1^\circ) + \sin(12.96^\circ - 60^\circ) \sin(-22.1^\circ) \theta = 28.258^\circ$$

$$\text{b) } \cos\theta Z = \cos\Phi \cos\omega \cos\delta + \sin\Phi \sin\delta$$

$$= \cos 12.96^\circ \cos 16.5^\circ \cos -22.1^\circ + \sin 12.96^\circ \sin -22.1^\circ \theta Z = 18.18^\circ$$

$$\text{c) } R_b = \cos\theta / \cos\theta Z$$

$$= 0.927$$

$$\text{d) } \text{Air mass } L_a :- L_a = 1 / \cos\theta Z$$

$$L_a = 1 / \cos 18.8^\circ$$

$$= 1.05$$

$$\text{e) } I_n = A_e - B L_a$$

$$= 1196(e - 0.143 \times 1.730)$$

$$= 1028.1 \text{ W/m}^2$$

$$\text{f) } I_b = I_n (\cos\theta Z)$$

$$= 977.1 \text{ W/m}^2$$

$$I_d = 0.105 \times 1028.1$$

$$= 107.94 \text{ W/m}^2$$

$$\text{g) } I_g = I_b + I_d$$

$$= 977.1 + 107.94$$

$$= 1084.94 \text{ W/m}^2$$

h) Radiation on tilted surface IT

$$\begin{aligned} IT &= I_b R_b + I_d (1 + \cos \beta / 2) + I_g \cdot \rho (1 - \cos \beta / 2) \\ &= 977.1(0.927) + 107.94(0.75) + 1084.94(0.6)(0.25) \\ &= 1149.37 \text{ W/m}^2 \end{aligned}$$

$$i) \quad \eta = m \text{ CP } (T_o - T_i)$$

$$AP \times IT = 0.00833 \times 4184 (42 - 27)$$

$$2 \times 1149.37$$

$$= 22.98 \%$$

Similarly Hourly global radiations and efficiencies are calculated for all the trials up to 17.00 hrs and are tabulated

Sl no	I.S.T Hours	Radiation on tilted surface IT(W/m ²)	Thermal efficiency η (%)
1	8.00	669.33	5.2
2	9.00	888.977	9.7
3	10.00	1030.13	15.17
4	11.00	1149.37	22.98
5	12.00	1188.75	26.29
6	13.00	1166.33	30.60
7	14.00	1047.21	28.19
8	15.00	877.41	19.47
9	16.00	687.852	15.14
10	17.00	485.3	10.73

Table 2 Calculated efficiency and global radiation

$$\begin{aligned} \text{The average efficiency Over a day is given by } \eta &= \frac{\int_0^t m \text{ CP } (T_o - T_i) dt}{\int_0^t (AP \times IT \times dt)} \\ &= 29.11 \% \end{aligned}$$

2) Test Procedure

Two identical single cover flat plate collector were placed with an angle at 28° to the horizontal

towards south facing. One collector is fixed and other one is tilted manually for every two hours with an angle of 30° for improving collector efficiency. Inlet temperature of the water and temperature of the hot water in the storage tank were tabulated on hourly basis, both the collector efficiency of the collectors were calculated.

Specification of Flat Plate Collector

- Length of the collector = 2m
- Width of the collector = 1m
- Length of the absorber plate = 1.95m
- Width of the absorber plate = 0.95m
- Material of the absorber plate = Copper
- Thermal conductivity of the plate material = 386 W/mK
- Density of the plate material = 8954 kg/m³
- Plate thickness = 34 gauge
- Diameter of the tube = 6.35m
- Tube center to center distance = 100mm
- Number of tubes used = 9
- Glass cover emissivity/absorptivity = 0.85
- Refractive index of glass relative to air = 1.5
- Diameter of header pipes = 12.7mm
- Insulating material used = Glass-wool
- Thermal conductivity of insulating material = 32.2*10.3 W/mK
- Density of insulating material = 200 kg/m³
- Material of collector tray = Mild steel
- Thermal conductivity of collector tray = 53.6 W/mK
- Density of collector tray = 7833 kg/m³

Efficiency Calculation

Average Solar radiation received by earth in terms of energy R = 900 W/m²/Hr. Solar radiation received by earth in 7 hours in terms of energy R = 900*7 W/m²/day R = 6300 Wh/m²

R = 22680000 W Sec/m², where

A = Area of Flat plate collector in m²

A. T₁ = Temperature of water at inlet in °C

B. T₂ = Temperature of water at outlet in °C
Mass of water taken in the storage tank = 100 kg

Specific heat of water = 4.182 KJ/KG °K Area of the flat plate collector,

$$A = L \cdot W \text{ m}^2$$

$$= 1.95 \cdot 0.95$$

$$= 1.8525 \text{ m}^2$$

Radiation receive by collector, $R1 = R \cdot A$

$$= 22680000 \cdot 1.8525$$

$$= 43014700 \text{ Joules}$$

Output of the Stationary Collector $Q = M \cdot C_p \cdot (T_2 - T_1)$

$$= 100 \cdot 4.187 \cdot 103 \cdot (42 - 22)$$

$$= 8374000 \text{ Joules}$$

Output of the partially rotating Collector $Q = M \cdot C_p \cdot (T_2 - T_1)$

$$= 100 \cdot 4.187 \cdot 103 \cdot (46 - 22)$$

$$= 10048800 \text{ Joules}$$

Efficiency of fixed flat plate collector

$\eta = \text{Output of the collector} / \text{Input Radiation} \eta = M \cdot C_p \cdot (T_2 - T_1) / R \cdot A$

$$= 8374000 \text{ Joules} / 43014700 \text{ Joules}$$

$$= 19.93\%$$

Efficiency of the partially rotating Collector $\eta = \text{Output of the collector} / \text{Input Radiation} \eta = M \cdot C_p \cdot (T_2 - T_1) / R \cdot A$

$$= 10048800 \text{ Joules} / 43014700 \text{ Joules}$$

$$= 23.92\%$$

V. RESULT AND DISCUSSIONS

Average global Radiation 878 WH/m² Average Wind Speed = 5.1 Km/hr

Time in Hours	Outlet temperature collector (T ₂ °C)	Outlet temperature tracking collector (T ₂ °C)
9:30	30	30
10:30	33	34
11:30	37	37
12:30	41	42
13:30	44	46
14:30	47	50
15:30	48	52
16:30	48	51
Average Temperature	41	42.75

Table 3 Results

Average global Radiation 1089 WH/m² Average

Wind Speed = 5.3 Km/hr

Time in Hours	Outlet temperature of stationary collector (T ₂ °C)	Outlet temperature of tracking collector (T ₂ °C)
9:30	30	30
10:30	33	34
11:30	37	37
12:30	42	42
13:30	46	46
14:30	48	50
15:30	50	52
16:30	51	55
Average Temperature	42.12	43.25

Table 4 Temperature distribution

COMPARISON OF EFFICIENCIES OF FIXED AND PARTIALLY ROTATING FLAT PLATE COLLECTORS

Efficiency of fixed flat plate Collector	Efficiency of the partially rotating Collector C.	Increase in Percentage of efficiency due to tracking D.
E. 9.93%	23.92%	F. 21%

Table 5 comparison

From the above calculation, we can conclude that by providing the manual tracking system to the collector with respect to solar beam we can improve the efficiency of the system and it can also be concluded that if we provide the continuous automatic tracking system to the collector, in terms of azimuth angle and altitude, we can still improve the efficiency of the system.

VI. VARIATION OF EFFICIENCY OF THE COLLECTOR WITH THERMAL EFFICIENCY

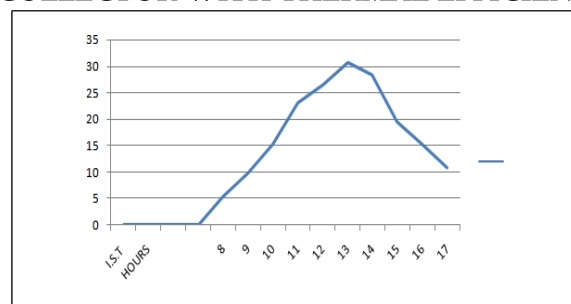


Figure 6. Efficiency versus Time

Figure 6 shows the variation of efficiency of the collector with time .It is evident that the efficiency increases with the time up to 1300 hrs due to the availability of intense beam radiation and slowly decreases during the sunset

VII. VARIATION OF EFFICIENCY WITH THE CALCULATED RADIATION

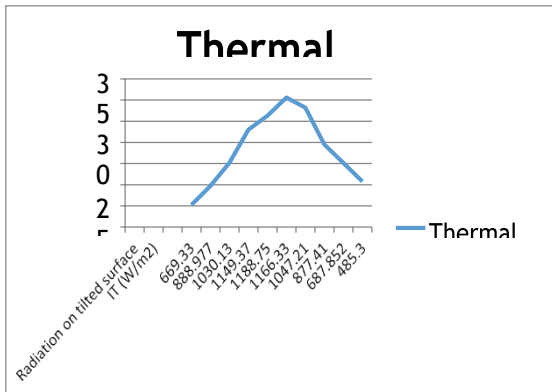


Figure 7. Efficiency versus Tilted radiation

Figure 7 shows the variation of efficiency with the calculated radiation IT .The curve is similar to the previous one .the maximum radiation corresponding to 1200 hrs.

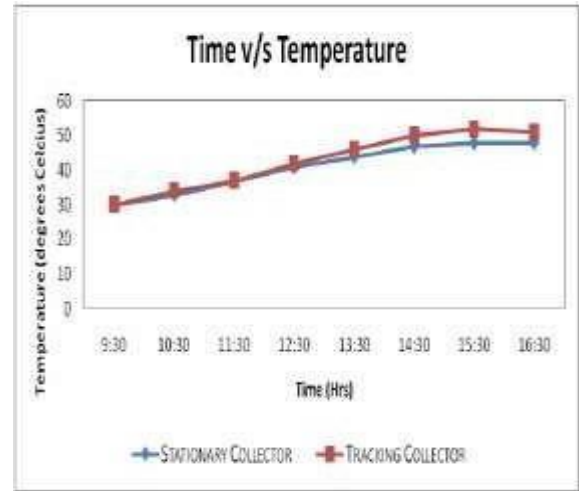
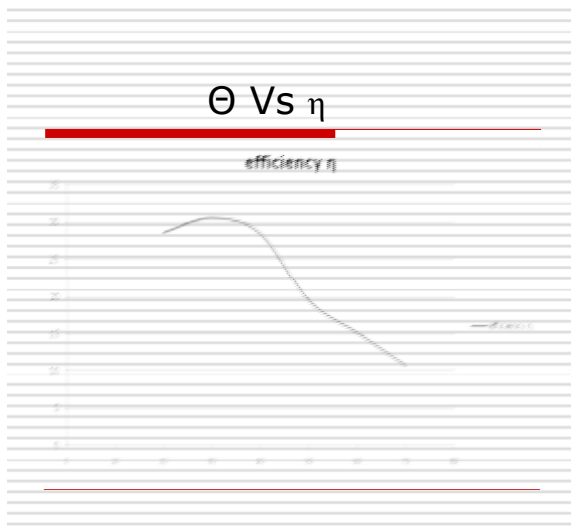


Figure 8 Incident angle θ v/s efficiency

The figure 8 shows the variation of efficiency with incident angle θ and figure 9 shows how temperature varies with respect to time for both stationary collector and tracking collector. The tracking collector utilizes maximum beam radiation. So the rise in temperature is high with respect to time in tracking collector compare to stationary collector and gives higher efficiency

VII. CONCLUSIONS

The Conclusions can be drawn based on the analysis of the collector. The instantaneous efficiency is assumed to be a function of only the temperatures of the fluid and the radiation IT. A more precise and detailed analysis should include the fact, that the overall heat loss coefficient (U_L) and other factors such as wind are not constants. Initially due to the transient effects the useful energy received is less. Efficiency decreases with increasing angle of incidence. Efficiency decreases with increasing ratio of diffuse to beam radiation. From the above results, it has been found that the system provided with manually tracking has got higher efficiency than the fixed flat plate collector by 21%. Hence Flat plate collector with tracking method utilizes maximum beam radiation and gives high efficiency when compared to fixed flat plate collector.

VIII. REFERENCES

- [1] Sunita Meena*, Chandan Swaroop Meena**, V.K.Bajpai*** “Thermal Performance of Flat-Plate Collector: An Experimental Study” in International Journal of Engineering Research and Applications (IJERA) ISSN: 2248-9622 National Conference on Advances in Engineering and Technology (AET- 29th March 2014) Ranjithkumar. K1, Pradeep kumar.S.L2, Jayaprakash. L3 “Design and Thermal Analysis of Solar Plate Collector with and Without Porous Medium” in International Journal of Innovative Research in Science, Engineering and Technology An ISO 3297: 2007 Certified Organization Volume 4, Special Issue 2, February 2015
- [2] Suresh Kumar *, S.C. Mullick “Glass cover temperature and top heat loss coefficient of a single glazed flat plate collector with nearly vertical configuration” in Ain Shams Engineering Journal 21 March 2012
- [3] ASHRAE Hand book 1993
- [4] Rumala.S.N. 1986, A shadow method of automatic Tracking.
- [5] Patil.J.V.1996. Design and fabrication of the two axes tracking system.
- [6] ASHRAE Handbook of Fundamentals, New York (1981).
- [7] Carg H. P. Treatise on solar energy; Volume 1: Fundamentals of solar energy. John Wiley, New York (1998)